


Electronic Training Equipment & Breadboard / Accessories



Systelec Electrónica Ltda
56-2-27363650-27365827
www.systelec.cl
Santiago de Chile

Logic Trainer IDL-400

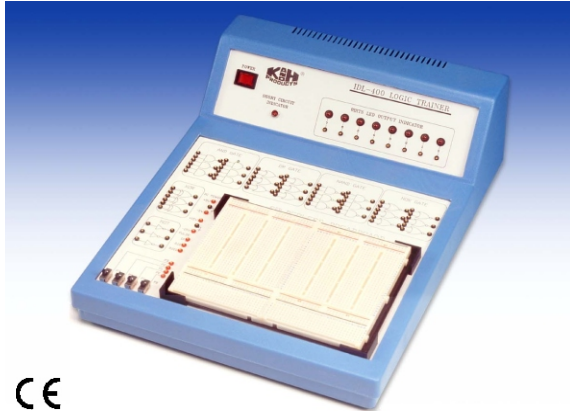

CE

The IDL-400 logic trainer is designed for the logic beginners to enhance the comprehension of basic logical theory. The design of IDL-400 is easy to operate and understand. It is equipped with various kinds of basic logic gates, debounced logical switches, LED indicators, DC power supply with short circuit protection, pulse generator and solderless breadboard.

Specification

- Basic logic gate units :
It contains 6 kinds of logic gates, i.e. AND gate X 6, OR gate X 6, NAND gate X 6, NOR gate X 6, XOR gate X 3 and NOT gate X 3.
Input voltage of HI level > 2.25V
Input voltage of LO level < 0.8V
- DC power supply: With short circuit protection and indicator
 - Output voltage +5V $\pm 5\%$
Max. output current 1 Amp.
Line regulation < 50 mV
Load regulation < 100 mV
 - Output voltage -5V $\pm 5\%$
Max. output current 500 mA
Line regulation < 25 mV
Load regulation < 30 mV
 - Output voltage $\pm 15V \pm 5\%$
Max. output current 500mA
Line regulation < 150mV
Load regulation < 150mV
- Pulse generator :
3 kinds of time interval : 1 sec., 0.1 sec., 0.01 sec.,
Output voltage +5V
- Debounced logic switch : HI/LO
- 8 bits LED output indicator : Max. input voltage $\leq 15 V$ DC
- Solderless breadboard : AD-200
Interconnected 1896 tie points, fitting all components with DIP sizes and solid wire AWG #22-30 (0.3-0.8 mm)
- Accessories :
 - Power cord
 - User manual
- Dimensions : 420 x 360 x 200 mm (L x W x H)
- Weight : 4.2 kg

